

# COLOR FLEX HOSE



Available Colour: Black, Red, Green, Blue (Colored hose are available up to half 1/2" size)


### Specifications

Inner Diameter mm	Outer Diameter mm	Maximum Working Pressure Mpa(kgf)	Weight (Kg/10mtr)	Minimum Bend Radius mm
6.3	12.5	1.0(10.2)	1.2	95
9.5	16.0		1.7	120
12.7	19.5		2.2	145
15.9	23.5		2.8	170

**Operating Temperature** -30°C to +60°C

**Minimum Coil Length** 100m/coil

**Fluids** Water Air

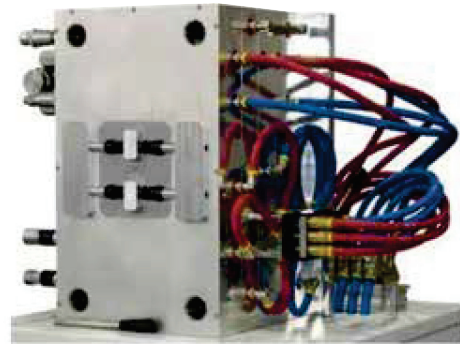

# WS18Z SERIES HOSE

### Specifications

Parts Number	Inner Diameter mm	Outer Diameter mm	Working Pressure (Mpa)	Min.Burst Pressure (Mpa)	Min.Bend Radius (mm)
WS18Z -04	6.3	12.7	1.8	7.0	76
WS18Z -06	9.5	15.9			76
WS18Z -08	12.7	19.0			127
WS18Z -12	19.0	26.2			178



Push lock hose fitting

**Use** Petroleum based hydraulic oil, fuel, lubricant oil

**Features** WS Hoses can be used Push-Lock fitting

**Fluids** Oil Air Water



- Internal tube: Oiliness synthetic rubber-resistant
- Outside cover: Oil, abrasion, weather resistant synthetic rubber
- Temperature range :  
 Oil : -40°C ~ +93°C  
 Air : Max. 70°C  
 Water : Max. 60°C