

Fastening Tool

IMPACT WRENCH

■ 3/8" (9.5mm) SQ.DR.

KW-7P

Drive Size	3/8 in.	9.5 mm
Bolt Capacity	5/16 in.	8.0 mm
Free Speed	8,800 r.p.m.	
Impact Per Min.	2,500 i.p.m.	
Recommended Torque	10-70 ft-lb	20-100 Nm
Maximum Torque	110 ft-lb	150 Nm
Length (w/o socket)	5-3/4 in.	145.0 mm
Weight (w/o socket)	2.2 lbs.	1.0 kg
Air Consumption (normal)	10.6 c.f.m.	0.30 m ³ /min
Hose Size	1/4 in.	6.5 mm
Anvil Length	11/16 in.	17.0 mm



Double Hammer

*Performance figures are at 0.62MPa(Pe) (90P.S.I.) air pressure.

■ 3/8" (9.5mm) SQ.DR.

KW-12MP

Drive Size	3/8 in.	9.5 mm
Bolt Capacity	3/16 in.	12.0 mm
Free Speed	6,300 r.p.m.	
Recommended Torque	40-130 ft-lb	60-170 Nm
Maximum Torque	130 ft-lb	170 Nm
Length (w/o socket)	6-9/16 in.	166.0 mm
Weight (w/o socket)	3.7 lbs.	1.7 kg
Air Consumption (normal)	6.0 c.f.m.	0.17 m ³ /min
Hose Size	1/4 in.	6.5 mm

Pin Clutch



*Performance figures are at 0.62MPa(Pe) (90P.S.I.) air pressure.

■ 3/8" (9.5mm) SQ.DR.

KW-12X

Drive Size	3/8 in.	9.5 mm
Bolt Capacity	1/2 in.	12.0 mm
Free Speed	7,000 r.p.m.	
Impact Per Min.	-	
Recommended Torque	20-130 ft-lb	30-180 Nm
Maximum Torque	130 ft-lb	180 Nm
Length (w/o socket)	6-5/16 in.	159.0 mm
Weight (w/o socket)	2.9 lbs.	1.3 kg
Air Consumption (normal)	12.4 c.f.m.	0.35 m ³ /min
Hose Size	1/4 in.	6.5 mm



Twin Hammer

*Performance figures are at 0.62MPa(Pe) (90P.S.I.) air pressure.

■ 1/2" (12.7mm) SQ.DR.

KW-14HP

Drive Size	1/2 in.	12.7 mm
Bolt Capacity	5/8 in.	16.0 mm
Free Speed	6,300 r.p.m.	
Impact Per Min.	1,200 i.p.m.	
Recommended Torque	70-260 ft-lb	90-350 Nm
Maximum Torque	330 ft-lb	450 Nm
Length (w/o socket)	7-13/16 in.	198.0 mm
Weight (w/o socket)	6.2 lbs.	2.8 kg
Air Consumption (normal)	12.4 c.f.m.	0.35 m ³ /min
Hose Size	1/4 in.	6.5 mm
Anvil Length (KW-14HP)	13/16 in.	20.0 mm
Anvil Length (KW-14HP-2)	2-1/16 in.	51.0 mm



Single Hammer

*Performance figures are at 0.62MPa(Pe) (90P.S.I.) air pressure.

■ 1/2" (12.7mm) SQ.DR.

KW-19HP

Drive Size	1/2 in.	12.7 mm
Bolt Capacity	11/16 in.	18.0 mm
Free Speed	6,000 r.p.m.	
Impact Per Min.	1,200 i.p.m.	
Recommended Torque	70-330 ft-lb	100-450 Nm
Maximum Torque	370 ft-lb	500 Nm
Length (w/o socket)	7-1/16 in.	178.0 mm
Weight (w/o socket)	5.3 lbs.	2.4 kg
Air Consumption (normal)	14.1 c.f.m.	0.40 m ³ /min
Hose Size	1/4 in.	6.5 mm
Anvil Length (KW-19HP)	1 in.	25.0 mm
Anvil Length (KW-19HP-2)	2-15/16 in.	75.0 mm



Twin Hammer

*Performance figures are at 0.62MPa(Pe) (90P.S.I.) air pressure.

■ 1/2" (12.7mm) SQ.DR.

KW-T160V

Drive Size	1/2 in.	12.7 mm
Bolt Capacity	5/8 in.	16.0 mm
Free Speed	6,300 r.p.m.	
Recommended Torque	70-300 ft-lb	100-400 Nm
Maximum Torque	490 ft-lb	660 Nm
Length (w/o socket)	6-3/4 in.	171.0 mm
Weight (w/o socket)	3.3 lbs.	1.5 kg
Air Consumption (normal)	9.2 c.f.m.	0.26 m ³ /min
Hose Size	1/4 in.	6.5 mm
Anvil Length	13/16 in.	20.0 mm



Twin Hammer

*Performance figures are at 0.62MPa(Pe) (90P.S.I.) air pressure.

Drive Size	3/4 in.	19.0 mm
Bolt Capacity	3/4 in.	20.0 mm
Free Speed	4,500 r.p.m.	
Impact Per Min.	1,080 i.p.m.	
Recommended Torque	110-480 ft-lb	150-650 Nm
Maximum Torque	480 ft-lb	650 Nm
Length (w/o socket)	9-1/2 in.	240.0 mm
Weight (w/o socket)	9.2 lbs.	4.2 kg
Air Consumption (normal)	16.6 c.f.m.	0.47 m³/min
Hose Size	3/8 in.	9.5 mm
Anvil Length (KW-20P)	1-7/16 in.	36.0 mm
Anvil Length (KW-20P-2)	2-7/8 in.	72.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

■3/4"(19mm) SQ.DR. KW-20P

Single Hammer



Drive Size	3/4 in.	19.0 mm
Bolt Capacity	7/8 in.	22.0 mm
Free Speed	4,300 r.p.m.	
Impact Per Min.	950 i.p.m.	
Recommended Torque	150-590 ft-lb	200-800 Nm
Maximum Torque	590 ft-lb	800 Nm
Length (w/o socket)	8-9/16 in.	216.0 mm
Weight (w/o socket)	8.8 lbs.	4.0 kg
Air Consumption (normal)	16.6 c.f.m.	0.47 m³/min
Hose Size	3/8 in.	9.5 mm
Anvil Length (KW-230P)	1-3/16 in.	29.0 mm
Anvil Length (KW-230P-2)	2-9/16 in.	65.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

■3/4"(19mm) SQ.DR. KW-230P

Swing Hammer



Drive Size	3/4 in.	19.0 mm
Bolt Capacity	7/8 in.	22.0 mm
Free Speed	3,800 r.p.m.	
Impact Per Min.	1,100 i.p.m.	
Recommended Torque	190-640 ft-lb	250-870 Nm
Maximum Torque	640 ft-lb	870 Nm
Length (w/o socket)	10 in.	253.0 mm
Weight (w/o socket)	13.6 lbs.	6.2 kg
Air Consumption (normal)	21.2 c.f.m.	0.60 m³/min
Hose Size	3/8 in.	9.5 mm
Anvil Length (KW-20PI)	1-1/4 in.	31.0 mm
Anvil Length (KW-20PI-2)	2-11/16 in.	67.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

■3/4"(19mm) SQ.DR. KW-20PI

Single Hammer



■3/4"(19mm) SQ.DR. KW-L17G

Drive Size	3/4 in.	19.0 mm
Bolt Capacity	3/4 in.	19.0 mm
Free Speed	6,500 r.p.m.	
Length (w/o socket)	12-5/16 in.	312.0 mm
Weight (w/o socket)	11.9 lbs.	5.4 kg
Air Consumption (normal)	21.2 c.f.m.	0.60 m³/min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-7/16 in.	36.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

Oil Bath Impact Wrench
Double Hammer



■3/4"(19mm) SQ.DR. KW-L176V

Oil Bath Anti-Vibration Impact
Wrench
Double Hammer



Drive Size	3/4 in.	19.0 mm
Bolt Capacity	3/4 in.	19.0 mm
Free Speed	6,500 r.p.m.	
Length (w/o socket)	14-7/8 in.	378.0 mm
Weight (w/o socket)	13.9 lbs.	6.3 kg
Air Consumption (normal)	21.2 c.f.m.	0.60 m³/min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-7/16 in.	36.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

■3/4"(19mm) SQ.DR. KW-20GI

Drive Size	3/4 in.	19.0 mm
Bolt Capacity	7/8 in.	22.0 mm
Free Speed	3,800 r.p.m.	
Impact Per Min.	1,100 i.p.m.	
Recommended Torque	190-640 ft-lb	250-870 Nm
Maximum Torque	640 ft-lb	870 Nm
Length (w/o socket)	12-15/16 in.	328.0 mm
Weight (w/o socket)	13.9 lbs.	6.3 kg
Air Consumption (normal)	21.2 c.f.m.	0.60 m³/min
Hose Size	3/8 in.	9.5 mm
Anvil Length (KW-20GI)	1-1/4 in.	31.0 mm
Anvil Length (KW-20GI-6)	6-11/16 in.	169.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

Choice of Inside/
Outside Trigger Handle.

Single Hammer



■3/4"(19mm) SQ.DR. KW-L20G

Oil Bath Impact Wrench
Double Hammer



Choice of Inside/
Outside Trigger Handle.

Drive Size	3/4 in.	19.0 mm
Bolt Capacity	7/8 in.	22.0 mm
Free Speed	4,500 r.p.m.	
Length (w/o socket)	13-3/16 in.	334.0 mm
Weight (w/o socket)	15.8 lbs.	7.2 kg
Air Consumption (normal)	21.2 c.f.m.	0.60 m³/min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-1/2 in.	38.0 mm

※Performance figures are at 0.62MPa(Pe)(90PS.I.)air pressure.

Fastening Tool

IMPACT WRENCH

1" (25.4mm) SQ.DR. KW-430P

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-9/16 in.	40.0 mm
Free Speed	4,300 r.p.m.	
Impact Per Min.	540 i.p.m.	
Recommended Torque	740-1,480 ft-lb	1,000-2,000 Nm
Length (w/o socket)	11-1/4 in.	285.0 mm
Weight (w/o socket)	24.0 lbs.	10.9 kg
Air Consumption (normal)	28.2 c.f.m.	0.80 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length (KW-430P)	1-11/16 in.	43.0 mm
Anvil Length (KW-430P-8)	8 in.	202 mm

Swing Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

1" (25.4mm) SQ.DR. KW-380P

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-1/2 in.	38.0 mm
Free Speed	3,200 r.p.m.	
Impact Per Min.	700 i.p.m.	
Recommended Torque	250-1,010 ft-lb	340-1,370 Nm
Maximum Torque	1,180 ft-lb	1,600 Nm
Length (w/o socket)	10-1/2 in.	266.0 mm
Weight (w/o socket)	21.1 lbs.	9.6 kg
Air Consumption (normal)	25.4 c.f.m.	0.72 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-1/2 in.	38.0 mm

Swing Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

1" (25.4mm) SQ.DR. KW-40P

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-9/16 in.	40.0 mm
Free Speed	2,100 r.p.m.	
Impact Per Min.	550 i.p.m.	
Recommended Torque	290-1,110 ft-lb	390-1,500 Nm
Maximum Torque	1,330 ft-lb	1,800 Nm
Length (w/o socket)	12-1/16 in.	306.0 mm
Weight (w/o socket)	27.5 lbs.	12.5 kg
Air Consumption (normal)	26.5 c.f.m.	0.75 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-5/16 in.	32.0 mm

Single Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

1" (25.4mm) SQ.DR. KW-385G

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-1/2 in.	38.0 mm
Free Speed	4,000 r.p.m.	
Impact Per Min.	700 i.p.m.	
Recommended Torque	250-1,010 ft-lb	340-1,370 Nm
Maximum Torque	1,180 ft-lb	1,600 Nm
Length (w/o socket)	13-13/16 in.	350.0 mm
Weight (w/o socket)	20.2 lbs.	9.2 kg
Air Consumption (normal)	25.4 c.f.m.	0.72 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-7/16 in.	36.0 mm

Choice of Inside/
Outside Trigger Handle.
Swing Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

1" (25.4mm) SQ.DR. KW-385GL

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-1/2 in.	38.0 mm
Free Speed	4,000 r.p.m.	
Impact Per Min.	700 i.p.m.	
Recommended Torque	250-1,010 ft-lb	340-1,370 Nm
Maximum Torque	1,180 ft-lb	1,600 Nm
Length (w/o socket)	20-1/8 in.	510.0 mm
Weight (w/o socket)	21.8 lbs.	9.9 kg
Air Consumption (normal)	25.4 c.f.m.	0.72 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	7-3/4 in.	196.0 mm

Choice of Inside/
Outside Trigger Handle.
Swing Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

1" (25.4mm) SQ.DR. KW-420G

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-5/8 in.	42.0 mm
Free Speed	3,000 r.p.m.	
Impact Per Min.	600 i.p.m.	
Recommended Torque	370-1,550 ft-lb	500-2,100 Nm
Maximum Torque	1,740 ft-lb	2,350 Nm
Length (w/o socket)	15 in.	381.0 mm
Weight (w/o socket)	28.8 lbs.	13.1 kg
Air Consumption (normal)	28.9 c.f.m.	0.82 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-7/16 in.	35.0 mm

Choice of Inside/
Outside Trigger Handle.
Swing Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

1" (25.4mm) SQ.DR. KW-420GL

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-5/8 in.	42.0 mm
Free Speed	3,000 r.p.m.	
Impact Per Min.	600 i.p.m.	
Recommended Torque	370-1,550 ft-lb	500-2,100 Nm
Maximum Torque	1,740 ft-lb	2,350 Nm
Length (w/o socket)	22-3/4 in.	577.0 mm
Weight (w/o socket)	31.0 lbs.	14.1 kg
Air Consumption (normal)	28.9 c.f.m.	0.82 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	9-1/16 in.	230.0 mm

Choice of Inside/
Outside Trigger Handle.
Swing Hammer



※Performance figures are at 0.62MPa(Pe) (90PS.I) air pressure.

■ 1" (25.4mm) SQ.DR.

KW-600H

Swing Hammer



Choice of Inside/
Outside Trigger Handle.


Drive Size	1 in.	25.4 mm
Bolt Capacity	2 in.	50.0 mm
Free Speed	2,300 r.p.m.	
Impact Per Min.	480 i.p.m.	
Recommended Torque	370-1,850 ft-lb	500-2,500 Nm
Maximum Torque	2,070 ft-lb	2,800 Nm
Length (w/o socket)	23-5/8 in.	599.0 mm
Weight (w/o socket)	34.8 lbs.	15.8 kg
Air Consumption (normal)	31.8 c.f.m.	0.90 m ³ /min
Hose Size	1/2 in.	12.7 mm

※ Performance figures are at 0.62MPa(Pe)(90PSI) air pressure.

■ 1" (25.4mm) SQ.DR.

KW-480GL

Swing Hammer

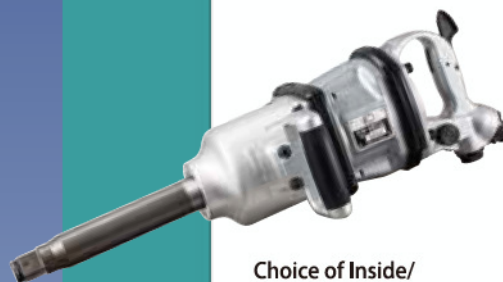

Choice of Inside/
Outside Trigger Handle.
Short Anvil available.

Drive Size	1 in.	25.4 mm
Bolt Capacity	2 in.	50.0 mm
Free Speed	2,700 r.p.m.	
Impact Per Min.	480 i.p.m.	
Recommended Torque	370-1,630 ft-lb	500-2,200 Nm
Maximum Torque	1,850 ft-lb	2,500 Nm
Length (w/o socket)	24-11/16 in.	626.0 mm
Weight (w/o socket)	37.0 lbs.	16.8 kg
Air Consumption (normal)	26.5 c.f.m.	0.75 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length (KW-480GL)	8-13/16 in.	223.0 mm

※ Performance figures are at 0.62MPa(Pe)(90PSI) air pressure.

■ 1" (25.4mm) SQ.DR.

KW-45G

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-3/4 in.	45.0 mm
Free Speed	3,000 r.p.m.	
Impact Per Min.	600 i.p.m.	
Recommended Torque	370-1,550 ft-lb	500-2,100 Nm
Maximum Torque	1,740 ft-lb	2,350 Nm
Length (w/o socket)	17-3/8 in.	440.0 mm
Weight (w/o socket)	33.7 lbs.	15.3 kg
Air Consumption (normal)	26.5 c.f.m.	0.75 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	1-11/16 in.	42.0 mm

※ Performance figures are at 0.62MPa(Pe)(90PSI) air pressure.

Single Hammer



Choice of Inside/
Outside Trigger Handle.

■ 1" (25.4mm) SQ.DR.

KW-45GL

Single Hammer



Choice of Inside/
Outside Trigger Handle.

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-3/4 in.	45.0 mm
Free Speed	3,000 r.p.m.	
Impact Per Min.	600 i.p.m.	
Recommended Torque	370-1,550 ft-lb	500-2,100 Nm
Maximum Torque	1,740 ft-lb	2,350 Nm
Length (w/o socket)	24-13/16 in.	630.0 mm
Weight (w/o socket)	36.7 lbs.	16.7 kg
Air Consumption (normal)	26.5 c.f.m.	0.75 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	9-3/16 in.	232.0 mm

※ Performance figures are at 0.62MPa(Pe)(90PSI) air pressure.

■ 1" (25.4mm) SQ.DR.

KW-450H

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-9/16 in.	40.0 mm
Free Speed	3,300 r.p.m.	
Impact Per Min.	450 i.p.m.	
Recommended Torque	370-1,480 ft-lb	500-2,000 Nm
Maximum Torque	1,630 ft-lb	2,200 Nm
Length (w/o socket)	21-1/16 in.	534.0 mm
Weight (w/o socket)	27.7 lbs.	12.6 kg
Air Consumption (normal)	28.9 c.f.m.	0.82 m ³ /min
Hose Size	1/2 in.	12.7 mm

※ Performance figures are at 0.62MPa(Pe)(90PSI) air pressure.

Swing Hammer



Choice of Inside/
Outside Trigger Handle.
Short Anvil available.

■ 1" (25.4mm) SQ.DR.

KW-500H

Single Hammer



Choice of Inside/
Outside Trigger Handle.
Short Anvil available.

Drive Size	1 in.	25.4 mm
Bolt Capacity	2 in.	50.0 mm
Free Speed	3,000 r.p.m.	
Impact Per Min.	600 i.p.m.	
Recommended Torque	370-1,590 ft-lb	500-2,150 Nm
Maximum Torque	1,780 ft-lb	2,400 Nm
Length (w/o socket)	24-13/16 in.	630.0 mm
Weight (w/o socket)	36.7 lbs.	16.7 kg
Air Consumption (normal)	27.9 c.f.m.	0.79 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	9-3/16 in.	232.0 mm

※ Performance figures are at 0.62MPa(Pe)(90PSI) air pressure.

Fastening Tool

IMPACT WRENCH

Heavy Duty Impact Wrench

■ SPLINE DR. HEAVY DUTY IMPACT WRENCH

KW-45FS

Drive Size	#5 Spline	
Bolt Capacity	1-5/16 in.**	33.0 mm**
Free Speed	2,800 r.p.m.	
Impact Per Min.	550 i.p.m.	
Recommended Torque	580-2,150 ft-lb	780-2,900 Nm
Maximum Torque	2,370 ft-lb	3,200 Nm
Length (w/o socket)	18-11/16 in.	474.0 mm
Weight (w/o socket)	38.7 lbs.	17.6 kg
Air Consumption (normal)	30.0 c.f.m.	0.85 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	2-3/16 in.	54.0 mm

Pin Clutch



Choice of Inside/
Outside Trigger Handle.

*Performance figures are at 0.62MPa(Pe)(90P.S.I.)air pressure.

**Designed for high tension bolt.

■ 1" (25.4mm) HEAVY DUTY IMPACT WRENCH

KW-45F-1

Pin Clutch



Choice of Inside/
Outside Trigger Handle.

**Designed for high tension bolt.

Drive Size	1 in.	25.4 mm
Bolt Capacity	1-5/16 in.**	33.0 mm**
Free Speed	2,800 r.p.m.	
Impact Per Min.	550 i.p.m.	
Recommended Torque	580-2,150 ft-lb	780-2,900 Nm
Maximum Torque	2,370 ft-lb	3,200 Nm
Length (w/o socket)	18-11/16 in.	474.0 mm
Weight (w/o socket)	37.8 lbs.	17.2 kg
Air Consumption (normal)	30.0 c.f.m.	0.85 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	2-3/16 in.	54.0 mm

*Performance figures are at 0.62MPa(Pe)(90P.S.I.)air pressure.

■ 1-1/2" (38.0mm) HEAVY DUTY IMPACT WRENCH

KW-45F

Pin Clutch



Choice of Inside/
Outside Trigger Handle.

**Designed for high tension bolt.

Drive Size	1-1/2 in.	38.0 mm
Bolt Capacity	1-5/16 in.**	33.0 mm**
Free Speed	2,800 r.p.m.	
Impact Per Min.	550 i.p.m.	
Recommended Torque	580-2,150 ft-lb	780-2,900 Nm
Maximum Torque	2,370 ft-lb	3,200 Nm
Length (w/o socket)	18-11/16 in.	474.0 mm
Weight (w/o socket)	37.8 lbs.	17.2 kg
Air Consumption (normal)	30.0 c.f.m.	0.85 m ³ /min
Hose Size	1/2 in.	12.7 mm
Anvil Length	2-3/16 in.	54.0 mm

*Performance figures are at 0.62MPa(Pe)(90P.S.I.)air pressure.

■ 1-1/2" (38.0mm) HEAVY DUTY IMPACT WRENCH

KW-75F

Pin Clutch



Choice of Inside/
Outside Trigger Handle.

**Designed for high tension bolt.

Drive Size	1-1/2 in.	38.0 mm
Bolt Capacity	2 in.**	50.0 mm**
Free Speed	2,000 r.p.m.	
Impact Per Min.	350 i.p.m.	
Recommended Torque	1,110-4,460 ft-lb	1,500-6,300 Nm
Maximum Torque	4,460 ft-lb	6,300 Nm
Length (w/o socket)	23-7/8 in.	605.0 mm
Weight (w/o socket)	83.8 lbs.	38.1 kg
Air Consumption (normal)	31.8 c.f.m.	0.90 m ³ /min
Hose Size	3/4 in.	19.0 mm
Anvil Length	2-1/16 in.	51.0 mm

*Performance figures are at 0.62MPa(Pe)(90P.S.I.)air pressure.