

NW 608



Scotsman
Ice Systems

Modular Ice Machine up to 320 kg

Item #:

Project:

Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!



NW 608
Full Cube 12 g
W 26,5 x D 26,5 x H 26 mm



NW H 608
Half Cube 6 g
W 13 x D 26,5 x H 26 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 608	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD	SB948	406

LEGEND:

- ✓ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 320 kg

12 January 2018

NW 608




Modular Ice Machine up to 320 kg

Item #:

Project:

Quantity:

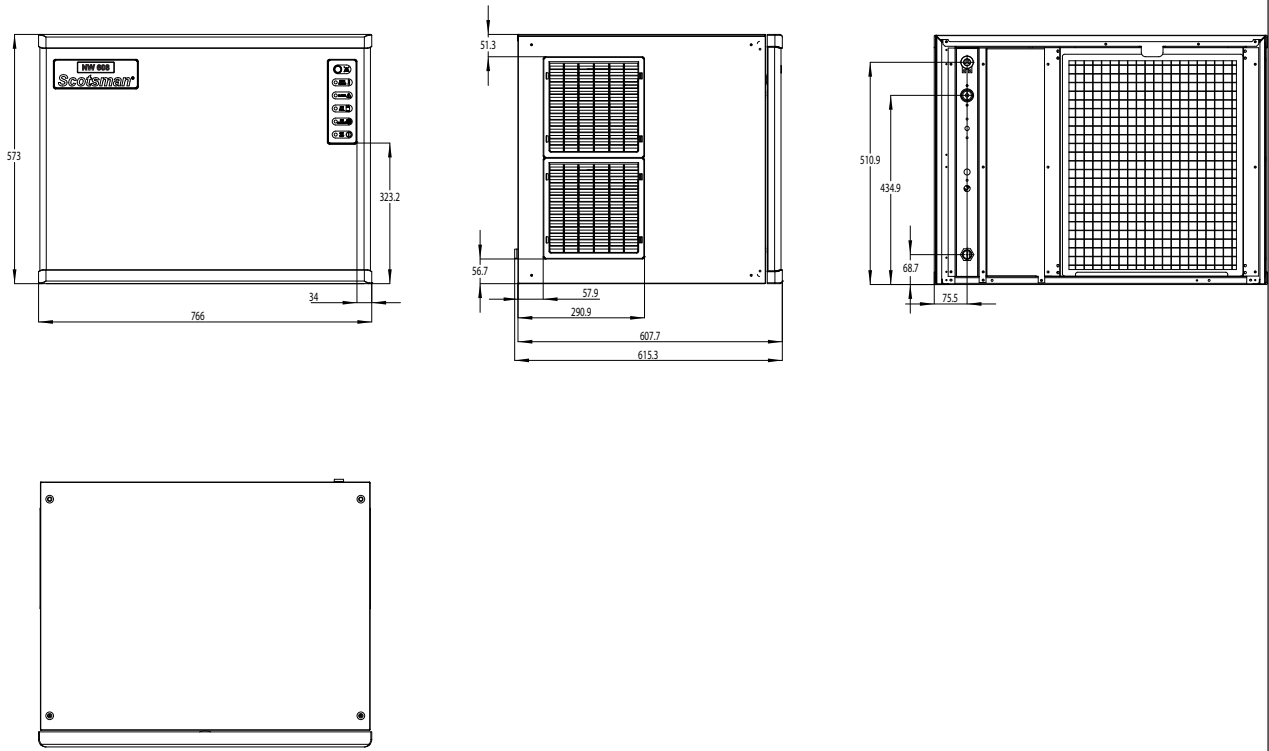

UNIT OF MEASUREMENT: mm

<div>UNIT DATA</div> <div>Size (W x D x H)760 x 620 x 575 mm</div> <div>Net weight78 kg</div> <div>SHIPPING DATA</div> <div>Carton (W x D x H)830 x 690 x 770 mm</div> <div>Weight92 kg</div>					Compressor		Circuit wires		Max. fuse size
			Version	Voltage	Btu/h	W	No.	Ømm²	A
			NW L 608 AS	230/50/1	16549	4850	3	1.5	16
			NW H 608 AS	230/50/1	16549	4850	3	1.5	16
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW L 608 AS	Air	230/50/1	320	280	210	16.3	36.6	16.9	1600
NW H 608 AS	Air	230/50/1	320	280	210	16.3	36.6	16.9	1600

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions