

NW 1408 XSafe

Scotsman
Ice Systems

Modular Ice Machine 640 kg

Item #:

Project:

Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 1408
Dice 10 g
W 22 x D 22 x H 22 mm



NW H 1408
Half Dice 6 g
W 10 x D 22 x H 28 mm



NW L 1408
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg
NW 1408	✓	SB530	243
	CBT48EAMCD CBT48FMCD	SB948	406
	CBT52EAMCD	SB1025	478
	●	UBH1100	553
	●	UBH1600	812

LEGEND:

- ✓ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 640 kg

NW 1408 *XSafe*


Scotsman®
Ice Systems

Modular Ice Machine 640 kg

Item #:

Project:

Quantity:

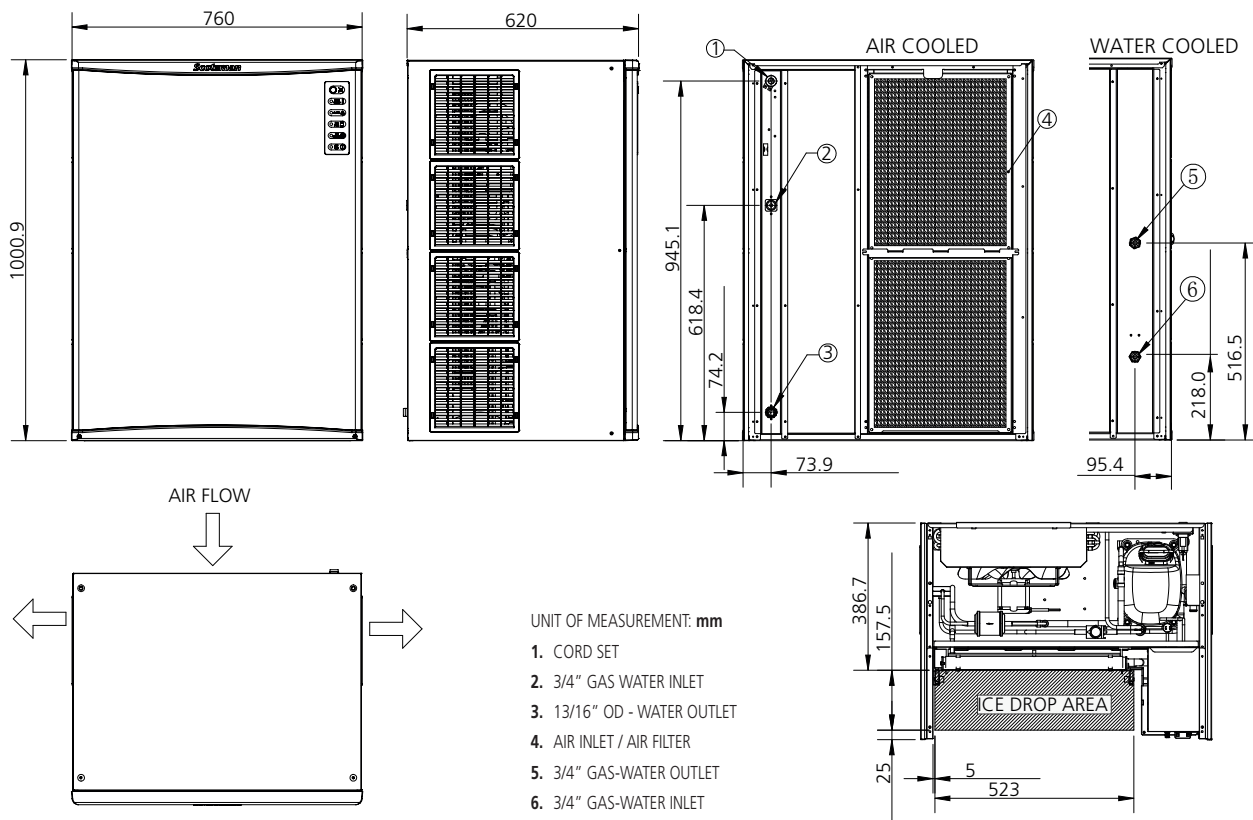

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		765 x 610 x 1000 mm		Carton (W x D x H)		830 x 690 x 1160 mm					
Net weight		130 kg		Weight		145 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NWH 1408 AS	230/50/1	660	650	530	10.8	57.2	31.1	3365	10500	3 x 2.5	30
NWH 1408 ASR	230/50/1	680	660	500	10.8	54.0	29.8	3365	10500	3 x 2.5	30
NWH 1408 WS	230/50/1	660	660	590	9.3	54.6	292.6	3365	10500	3 x 2.5	30
NWL 1408 AS	230/50/1	620	600	510	10.4	52.8	27.6	3365	10500	3 x 2.5	30
NWL 1408 WS	230/50/1	620	630	560	8.8	49.4	282.8	3365	10500	3 x 2.5	30
NW 1408 AS	230/50/1	640	630	500	11.2	56.2	26.6	3365	10500	3 x 2.5	30
NW 1408 WS	230/50/1	660	650	580	9.0	52.4	261.0	3365	10500	3 x 2.5	30
NWH 1408 AS	230/60/1	660	641	480	11.2	54.0	32.6	3000	9442	3 x 2.5	30
NWH 1408 ASR	230/60/1	630	580	480	11.7	56.1	25.5	3000	9442	3 x 2.5	30