



Features

- Dual Mode: produces alternatively individually formed Ice-shot glasses (2 cl) or XL Gourmet Ice Cubes (60 grams)
- Up to 2,450 Ice-shot glasses or up to 95 kg (209,5 lbs) daily XL ice cubes production
- Up to 50 kg (110 lbs) ice storage capacity
- Reduced height - fits under any counter
- Resistant stainless steel exterior
- Air cooled version only; front access condenser air filter, removable and washable
- Front panel mount ON-OFF Switch
- Routine Maintenance alarm light
- Ergonomically designed ice storage access, with disappearing door.
- Door-closing movement dampening system
- Storage bin area vapour-based microbial control system pouch
- Optional PWD System for remote water drain (easy-fit installation)
- Pivoting rear casters
- R-404A CFC-free refrigerant
- Protected by AgION antimicrobial agent

Routine maintenance Alarm



Proximity condenser air filter



Front ON-OFF switch



Easy bin access



Anti-microbial pouch




h. 798 mm with short legs



Pivoting rear wheels

AC 206 ICE SHOT Technologies



	 +C° -C°	24h					 D W H				
		10°: 10°C			21°: 15°C						
		[kg]	[lbs]	N°							
AC206 AS Ice Shot Mode		95	209,5	2450	89,5	197,5	2300	50	110	960	
AC206 AS XL Cube Mode		88	194	1700	84	185	1600	50	110	960	
AC206 WS Ice Shot Mode		n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	
AC206 WS XL Cube Mode		n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	
									mm 80 3 1/8"		
									[WxDxH mm] 1250x620x780/860		
									[WxDxH inches] 49x24x30/33		
											
									[v/Hz/ph] 230/50/1	R 404 A	

This product qualifies for the following listings:



3 Years Warranty

Subject to certain limitations and exclusions



40 gr.

Extra Large Gourmet
60 gr.
Ø 44 x H 46 mm




www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Certified ISO 9001:2000

Self Contained Ice Machine
up to 95 Kg/24h.

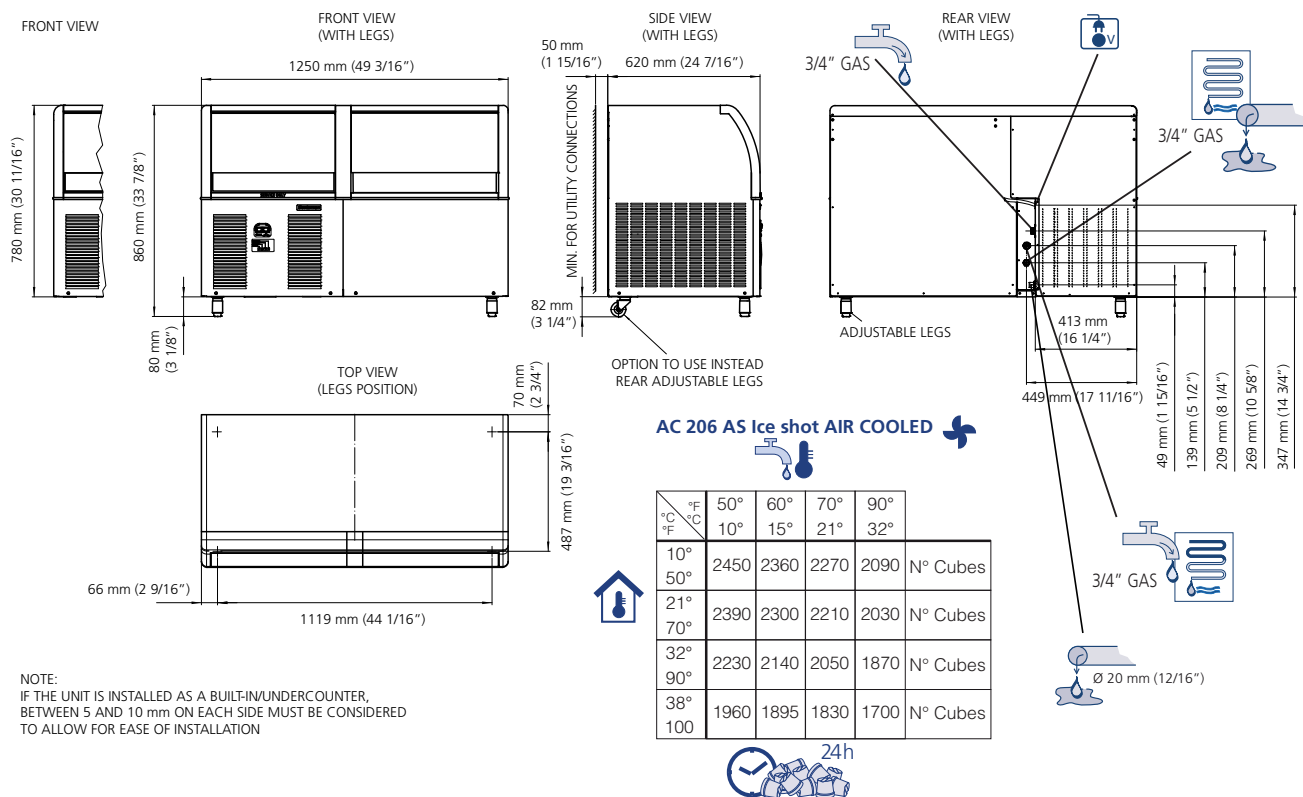AC 206 AS XL AIR COOLED AC 206 WS XL WATER COOLED 

°F °C	50°	60°	70°	90°	
	10°	15°	21°	32°	
10°	95	91,5	88	81	kg
50°	209,5	201,5	194	178,5	lbs
21°	93	89,5	86	79	kg
70°	205	197,5	189,5	174	lbs
32°	87,5	84	80,5	73,5	kg
90°	193	185	177,5	162	lbs
38°	76,5	74	71,5	66,5	kg
100	168,5	163	157,5	146,5	lbs

°F °C	50°	60°	70°	90°	
	10°	15°	21°	32°	
10°	n.a.	n.a.	n.a.	n.a.	kg
50°	n.a.	n.a.	n.a.	n.a.	lbs
21°	n.a.	n.a.	n.a.	n.a.	kg
70°	n.a.	n.a.	n.a.	n.a.	lbs
32°	n.a.	n.a.	n.a.	n.a.	kg
90°	n.a.	n.a.	n.a.	n.a.	lbs
38°	n.a.	n.a.	n.a.	n.a.	kg
100	n.a.	n.a.	n.a.	n.a.	lbs

Minimum		Maximum
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
-10%		+10%
1 BAR 14 psi		5 BAR 70 psi

											
		[Btu/h] [W]	[Ømm2]	[W]	FUSE	100 Kg [kWh - 100 Kg]	32°C 90°F 21°C 70°F	32°C 90°F 21°C 70°F	[kg] [lbs]	[kg] [lbs]	[kg] [lbs]
AC206 AS Ice shot		7165 2100	1,5	900	16	25,7	20,4	5,38	83 183	96 211	96 211
AC206 AS XL		7165 2100	1,5	900	16	26,9	12,5	3,8	83 183	96 211	96 211
AC206 WS Ice shot		7165 2100	1,5	900	16	n.a.	n.a.	n.a.	83 183	96 211	96 211
AC206 WS XL		7165 2100	1,5	900	16	n.a.	n.a.	n.a.	83 183	96 211	96 211