Modular Ice Machine 150 kg

MXG 328 XSafe

Modular Ice Machine 150 kg



Item #:
Project:
Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG L 328 Large Gourmet 39 g Ø 38 x H 41 mm



MXG M 328 Medium Gourmet 20 g Ø 30 x H 34 mm



MXG S 328 Small Gourmet 8 q Ø 21 x H 25 mm

CONDENSING SYSTEM	RECOMMENDED BINS					
	Head	Bins	kg			
Air cooled	MVC 220	V	SB193	129		
Water cooled	MXG 328	V	SB322	168		

REFRIGERANT GAS

R404A R452A

VOLTAGE V/Hz/ph

230/50/1 230/60/1

Air temperature

Water pressure

Electrical voltage

Water temperature

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxxx : need additional bin top

OPERATING REQUIREMENTS Minimum

CERTIFICATIONS











×.	LOA

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

5 38 1 bar (14 psi) 5 bar (70 psi) -10% +10%

Maximum


43

MXG 328 XSafe

Scotsman[®] Ice Systems

Modular Ice Machine 150 kg

Item #:
Project:
Quantity:

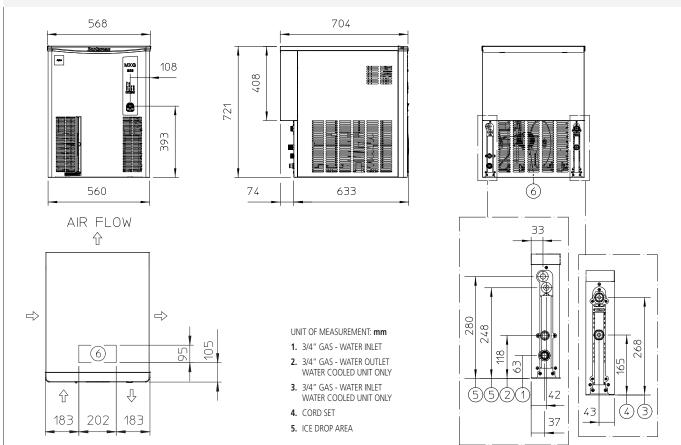

				Π
UNIT DATA		SHIPPING DATA		
Size (W x D x H)	568 x 704 x 721 mm	Carton (W x D x H)	630 x 770 x 910 mm	
Net weight	66 kg	Weight	77 kg	

		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version Voltage	1/ 1/	10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/	l/h	w	w	No. x Ømm²	А
	Voltage	kg	kg	kg	100 kg	24h					
MXGL 328 AS	230/50/1	140	137	110	20.5	22.5	10.8	1170	2650	3 x 1.5	16
MXGL 328 WS	230/50/1	135	133	114	17.2	19.6	79.2	950	2650	3 x 1.5	16
MXGM 328 AS	230/50/1	150	147	110	21.2	23.3	13.3	1200	2650	3 x 1.5	16
MXGM 328 WS	230/50/1	150	145	126	15.8	20.5	91.7	950	2650	3 x 1.5	16
MXGS 328 AS	230/50/1	145	132	105	21.2	22.2	14.0	990	2570	3 x 1.5	16
MXGS 328 WS	230/50/1	155	148	130	16.7	21.7	150.0	960	2570	3 x 1.5	16
MXGL 328 AS	230/60/1	144	141	112	23.8	26.2	15.0	1350	3100	3 x 1.5	16
MXGM 328 AS	230/60/1	150	144	110	24.7	27.2	14.6	1360	3115	3 x 1.5	16
MXGM 328 WS	230/60/1	150	144	130	20.0	26.0	125.0	1200	3115	3 x 1.5	16
MXGS 328 AS	230/60/1	165	152	130	20.8	27.0	160.4	1200	3115	3 x 1.5	16
MXGS 328 WS	230/60/1	165	152	130	20.8	27.0	160.4	1200	3115	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions