



Socket, separate contact, 5 A, relay type RXG2, screw connector, 250 V AC

RGZE1S48M

١	J	1	а	ı	r

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Separate

Complementary	
Product compatibility	Plug-in relay RXG with 2 C/O contact
[Ui] rated insulation voltage	250 V
[Uimp] rated impulse withstand voltage	6 kV between coil and contact with reinforced insulation 4 kV between contacts with basic insulation 4 kV between poles with basic insulation 4 kV between terminals and DIN rail with basic insulation
[In] rated current	5 A
[Ue] rated operational voltage	250 V conforming to IEC 300 V conforming to UL
Dielectric strength	5 kV between coil and contact with reinforced insulation 2.5 kV between contacts with basic insulation 3 kV between poles with basic insulation 3 kV between terminals and DIN rail with basic insulation
Connections - terminals	Screw terminals, 1 x 0.251 x 2.5 mm² (AWG 22AWG 14) flexible with cable end Screw terminals, 2 x 0.252 x 1 mm² (AWG 22AWG 17) flexible with cable end Screw terminals, 2 x 0.52 x 1.5 mm² (AWG 20AWG 16) solid without cable end Screw terminals, 1 x 0.51 x 2.5 mm² (AWG 20AWG 14) solid without cable end
Screw type	M3

Environment

Ambient air temperature for storage	-4085 °C
Ambient air temperature for operation	-4070 °C
Relative humidity	1085 %
Standards	CSA C22.2 No 14 IEC 61984 UL 508
Product certifications	EAC CE CSA UL DNV-GL
IP degree of protection	IP20

Pollution degree	3
Packing Units	
Unit Type of Package 1	Db
Number of Units in Package 1	1
Package 1 Height	6.15 cm
Package 1 Width	1.6 cm
Package 1 Length	8 cm
Package 1 Weight	39.7 g
Unit Type of Package 2	Gyári csomagolás
Number of Units in Package 2	10
Package 2 Height	7.8 cm
Package 2 Width	8.4 cm
Package 2 Length	16.3 cm

Ш

445 g

Doboz

180

30 cm

30 cm

40 cm

8.648 kg

Offer Sustainability

Package 2 Weight

Package 3 Height

Package 3 Width

Package 3 Length

Package 3 Weight

Unit Type of Package 3


Number of Units in Package 3

Overvoltage category

Offer Sustamability	
Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings


Dimensions

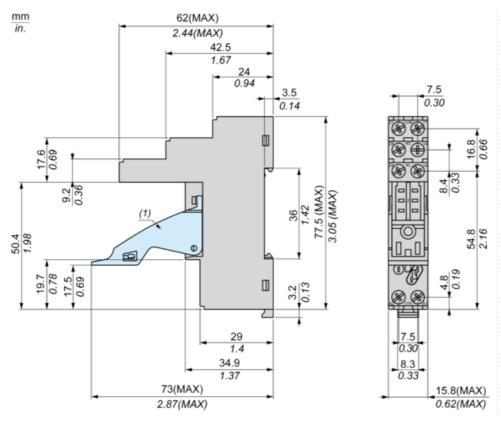

(1) Maintaining clamp

Connections and Schema

Wiring Diagram



Recommended replacement(s)