

## TORQUE WRENCH, PRESET TYPE (DIGITAL READING)

Calibration Certificate Included


Test Report

Traceability Chart

Torque wrench with a digital display for bolts/nuts tightening.

Torque setting is available through the display that shows the numerical value.

When the preset torque value is reached, the wrench will make a click sound and slight opposed force.



Visible Indicator  
(Patent and design are already registered.)




How to use video  
<https://youtu.be/nMxE00ZiBbE>

Models	Torque Range (N·m)	Increments	Units	Sq.dr A (mm)	Dimensions (mm)				Hand force at Max. torque (N)	Suitable bolt		Qty./Carton	Weight (kg)	Case Dimensions
					B	H	T	L		Ordinary	High strength			
<b>T2MN6</b>	1 ~ 6	0.1	N·m	6.35	24.0	18.3	10.4	222	40	M4 ~ M6	M4	1	0.26	305 × 97 × 70
<b>T2MN10</b>	2 ~ 10	0.2	N·m	6.35	24.0	18.3	10.4	253	55	M4 ~ M6	M4	1	0.29	305 × 97 × 70
<b>T2MN13</b>	3 ~ 13	0.2	N·m	6.35	24.0	18.3	10.4	253	71	M6 ~ M8	M5 ~ M6	1	0.29	305 × 97 × 70
<b>T2MN15</b>	3 ~ 15	0.2	N·m	6.35	24.0	18.3	10.4	253	83	M6 ~ M8	M5 ~ M6	1	0.29	305 × 97 × 70
<b>T3MN20</b>	4 ~ 20	0.2	N·m	9.5	24.0	21.5	10.4	253	110	M6 ~ M8	M5 ~ M6	1	0.30	305 × 97 × 70
<b>T3MN25</b>	5 ~ 25	0.2	N·m	9.5	24.0	21.5	10.4	253	138	M6 ~ M8	M5 ~ M6	1	0.30	305 × 97 × 70
<b>T3MN50</b>	10 ~ 50	0.5	N·m	9.5	36.0	26.4	14.0	308	227	M10	M8	1	0.52	355 × 97 × 70
<b>T4MN50</b>	10 ~ 50	0.5	N·m	12.7	36.0	30.4	14.0	308	227	M10	M8	1	0.55	355 × 97 × 70
<b>T3MN100</b>	20 ~ 100	1	N·m	9.5	36.0	26.4	14.0	387	335	M12 ~ M14	M10	1	0.75	505 × 97 × 70
<b>T4MN100</b>	20 ~ 100	1	N·m	12.7	36.0	30.4	14.0	387	335	M12 ~ M14	M10	1	0.77	505 × 97 × 70
<b>T4MN140</b>	30 ~ 140	1	N·m	12.7	36.0	30.4	14.0	450	388	M14	M10 ~ M12	1	0.82	505 × 97 × 70
<b>T4MN200</b>	40 ~ 200	2	N·m	12.7	45.2	34.0	17.8	526	474	M14 ~ M16	M12	1	1.40	765 × 97 × 70
<b>T4MN300</b>	40 ~ 300	2	N·m	12.7	45.2	34.0	17.8	716	491	M14 ~ M20	M12 ~ M14	1	1.88	765 × 97 × 70
<b>T6MN300</b>	40 ~ 300	2	N·m	19.0	45.2	41.5	17.8	716	491	M14 ~ M20	M12 ~ M14	1	1.89	765 × 97 × 70

※ This product is registered design.

- N·m specification
- Torque Accuracy ± 3%

Accessory	
Calibration Certificate W/H Traceability	1
Instruction Manual	1
Plastic Case	1

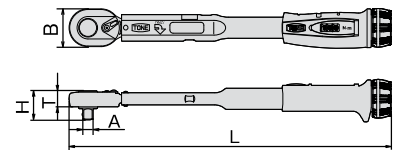

The minimum capacity range of T4MN300 and T6MN300 has been expanded from 60N·m to 40N·m.

### Expire Date of Calibration Certificate

- When not in use, the product can stay up to 3 years after calibration date mentioned in the certificate.
- If the usage started after 3 years from calibration date, it can be used up to 1 year since the first usage or up to 10,000 tightening times.

### Repair·Maintenance

- Inaccuracy may occur if not used for a long time or inappropriate use of tool. Please contact your distributor regularly for accuracy check.
- Please contact your distributor in case of experiencing tool malfunction (no clicking sound, slight force, etc.)
- Torque devices require regular inspection (once a year or 10,000 times afterwards). Checking service is available with service charge.
- For more information about tool handling, please contact your distributor.
- Accuracy range after repair will be ± 4%.