Modular Ice Machine 400 kg

MXG 938 XSafe

Scotsman

Modular Ice Machine 400 kg

Item #:
Project:
Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG L 938 Large Gourmet 39 g Ø 38 x H 41 mm



MXG M 938 Medium Gourmet 20 g Ø 30 x H 34 mm

CONDENSING SYSTEM	RECOMMENDED BINS					
	Head	Bins	kg			
Air cooled Remote condenser Water cooled REFRIGERANT GAS	MXG 938	✓	SB393	181		
		✓	SB530	243		
		BINTOPMXGSB55	SB550	252		
		CBT48EAMCD	SB948	406		
		CBT52EAMCD	SB1025	478		
R404A R452A		•	UBH1600	812		
		•	SIS1350	613 + 73 + 73		

VOLTAGE V/Hz/ph

230/60/3 400/50/3N

LEGEND:

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation
 CBTxxxxxxxxx : need additional bin top

CERTIFICATIONS













Minimum Maximum 10 43 Air temperature 5 38 Water temperature 1 bar (14 psi) 5 bar (70 psi) Water pressure -10% +10% Electrical voltage

OPERATING REQUIREMENTS

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals


www.scotsman-ice.it www.scotsman-ice.com

MXG 938 xsafe

Scotsman° Ice Systems

Modular Ice Machine 400 kg

Item #:
Project:
Quantity:

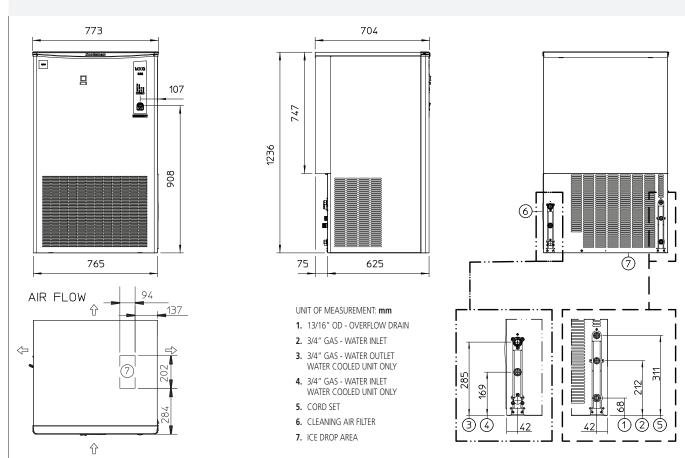

UNIT DATA		SHIPPING DATA	SHIPPING DATA			
Size (W x D x H)	773 x 704 x 1236 mm	Carton (W x D x H)	830 x 770 x 1430 mm			
Net weight	143 kg	Weight	158 kg			

		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
	ersion Voltage 10°C/10°C kg	21°C/10°C	32°C/21°C	kWh/	kWh/						
Version		kg	kg	kg	100 kg	24h	l/h	W	W	No. x Ømm²	Α
MXGL 938 AS	400/50/3N	330	325	250	28.4	71.0	43.1	3200	13500	5 x 1.5	20
MXGL 938 WS	400/50/3N	330	328	300	21.8	65.5	195.8	3000	13500	5 x 1.5	20
MXGM 938 AS	400/50/3N	400	375	300	22.0	69.3	37.5	3200	13500	5 x 1.5	20
MXGM 938 ASR	400/50/3N	400	395	345	20.5	69.6	43.8	3200	13500	5 x 2.5	20
MXGM 938 WS	400/50/3N	400	380	350	19.0	66.5	191.7	2800	13500	5 x 1.5	20
MXGM 938 AS	230/60/3	400	375	300	22.0	69.3	37.5	3200	13500	4 x 2.5	20

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions